

SURVEYOR NOTES:
OWNER OF RECORD:
STEPHEN R. LEVINE
BOOK 19523, PAGE 573
ZONING DISTRICT
RH

GENERAL NOTES:

1. SEE GENERAL NOTES ON TITLE SHEET.
2. THIS PLAN SET IS BASED ON A SURVEY PLAN BY RICHARD J. MEDE, P.L.S. TITLED "CERTIFIED PLOT PLAN, 27 MARSHLAND STREET, HAVERHILL, MA (MIDDLESEX COUNTY)", DATED MARCH 21, 2028. THIS PLAN SHALL NOT BE USED TO ESTABLISH PROPERTY LINES UNLESS IT CONTAINS A P.L.S. STAMP.
3. IF CONDITIONS DO NOT MATCH INFORMATION, IE LEDGE, GW ELEVATIONS, SURVEY DISCREPANCIES, ETC., CONTRACTOR SHALL NOTIFY ENGINEER IMMEDIATELY.
4. GENERAL CONTRACTOR IS RESPONSIBLE FOR VERIFYING THESE DIMENSIONS PRIOR TO CONSTRUCTION AND NOTING IF DISCREPANCIES OCCUR BETWEEN BUILDING PLANS.
5. CONTRACTOR MUST CALL ENGINEERING SOLUTIONS GROUP LLC PRIOR TO CONSTRUCTION. DRAINAGE SYSTEM SHALL BE CALLED FOR INSPECTION PRIOR TO BACKFILL AND 48-HOUR ADVANCED NOTICE PROVIDED.
6. ALL GUTTERS DRAINING TO INFILTRATION SYSTEM SHALL HAVE DEBRIS GUARDS. ALL PIPES TO SYSTEM SHALL HAVE A MINIMUM SLOPE OF 2%.
7. BED ALL SEWER PIPE IN 2" CRUSHED STONE 6" AROUND.
8. ALL SEWER WORK WITHIN 10 FT OF THE FOUNDATION SHALL BE DESIGNED BY THE PLUMBER IN ACCORDANCE WITH THE LOCAL AND STATE PLUMBING CODES & IN ACCORDANCE WITH LOCAL INSPECTOR/FOUNDATION DESIGNER DETAILS. 4" SCH 40 PVC AND DR SLEEVES ARE COMMONLY USED. NO PIPES SHALL BE PLACED UNDER THE FOOTING WITHOUT STEPPING THE FOOTING BELOW THE PIPE. AXX FENCO TO CIVIL SCOPE.
9. CONTACT ENGINEER PRIOR TO STORMWATER SYSTEM INSTALLATION. TOWN INSPECTION AND ENGINEER INSPECTION REQUIRED AT VARIOUS PHASES. SUB GRADE, STONE, SYSTEM INSTALLATION AND POST INSTALLATION AFTER DOWNSPOUTS CONNECTED.
10. CONTRACTOR TO CONFIRM CONSISTENCY WITH BUILDING PLAN SECTION HEIGHTS AND COORDINATE WITH BUILDING DEPARTMENT TO ENSURE CONFORMANCE PRIOR TO CONSTRUCTION AND VERIFY POST CONSTRUCTION.
11. POOL, FENCING, AND WALLS SHALL BE DESIGNED BY THE CONTRACTORS PROFESSIONALS AND ARE NOT DESIGNED HEREIN.
12. CONTRACTOR TO ENSURE BUILDING DIMENSIONS FROM FINAL PLANS MATCH FOUNDATION SURVEY LAYOUT (INCLUDING IN THE FIELD) BEFORE PROCEEDING. THIS SHOULD BE CHECKED PRIOR TO POURING CONCRETE.
13. DOWNSPOUTS SHALL BE COLLECTED VIA PVC PIPE. 4" PVC PERMITTED VERTICALLY. HORIZONTAL PIPING SHALL BE 6" PVC. MINIMUM 2% SLOPE, MINIMUM 6" COVER AT STARTING POINT. NOT PERMITTED UNDER DRIVEWAY OR PATIOS. SEE DOWNSPOUT DRAIN SYSTEM DETAIL.

CATCHMENT AREA BREAKDOWN CHART		
	EXISTING (S.F.)	PROPOSED (S.F.)
DWELLING/STRUCTURES	1,357	3,284
ASPHALT DRIVEWAY, WALKWAYS, PATIOS & OTHER IMPERVIOUS	800	1,875
GRASS/ LAWN	10,988	7,986
TOTAL	13,145	13,145
INCREASED IMPERVIOUS AREA = 3,002 S.F.		

SUBSURFACE INFILTRATION SYSTEM:


(3) 1x3 STORMTECH SC-310 (TYP)
CHAMBERS SURROUNDED IN
12" CRUSHED STONE ON SIDES
12" CRUSHED STONE ON ENDS
6" CRUSHED STONE ON TOP
6" CRUSHED STONE ON BOTTOM

AVG. SURFACE EL.=TBD
TOP STONE=TBD
TOP CHAMBER=TBD
6" PVC INV=TBD
BOT CHAMBER=TBD
BOT STONE=TBD

PIPE 1,001 SF OF PROPOSED ROOF TO EACH
STORMTECH SYSTEM

PIPE TOTAL 3,003 SF OF PROPOSED ROOF TO
STORMTECH SYSTEMS

RATE APPLIED FOR PROPOSED SYSTEM (RAWS 1.02
IN/HR-FINE SANDY LOAM)

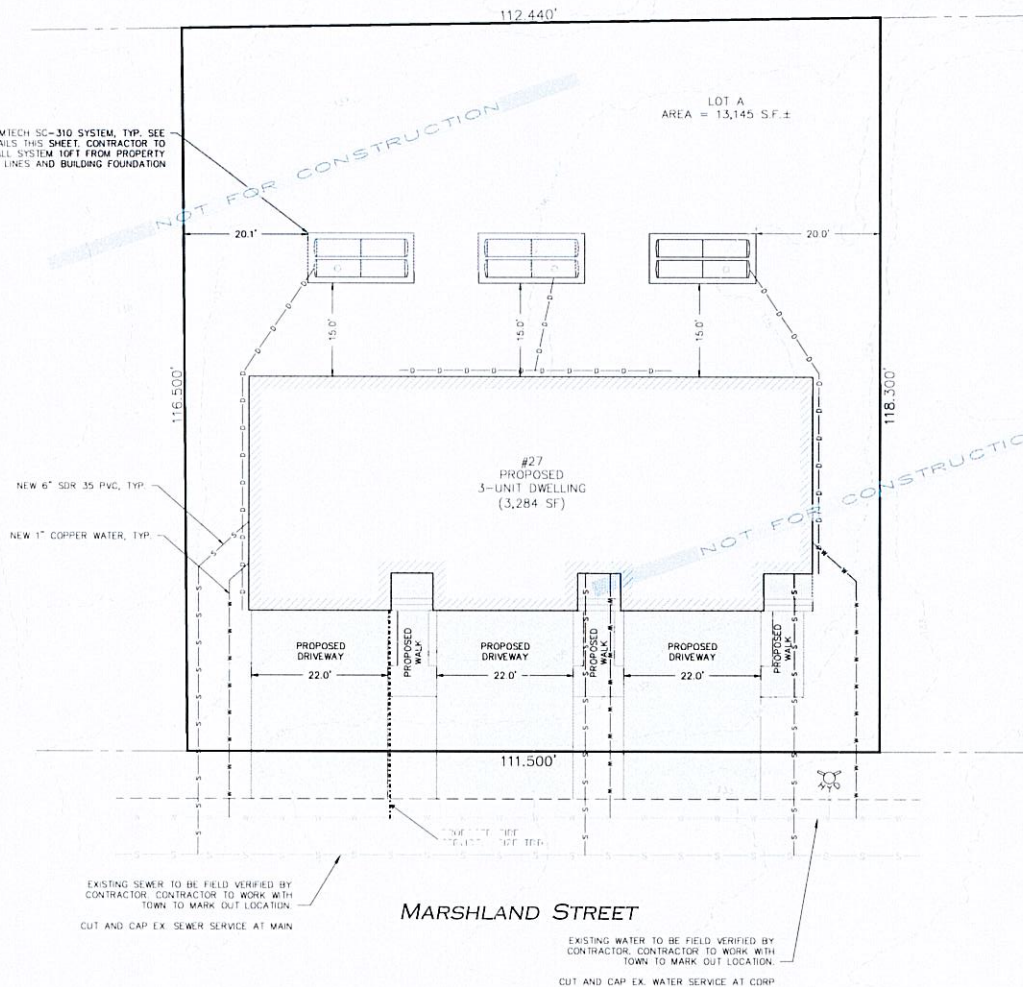

ENGINEERING SOLUTIONS GROUP LLC
MARBLEHEAD, MA 01945

CONCEPTUAL
CIVIL SITE PLAN

27 MARSHLAND ST.
HAVERHILL, MA



DATE: 09/15/28
DRAWN BY: BTC
CHECKED BY: BDD